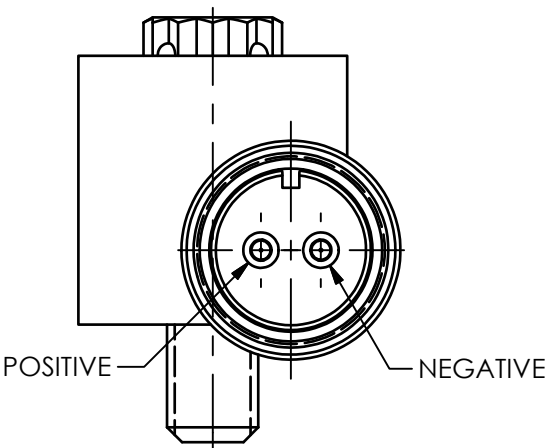
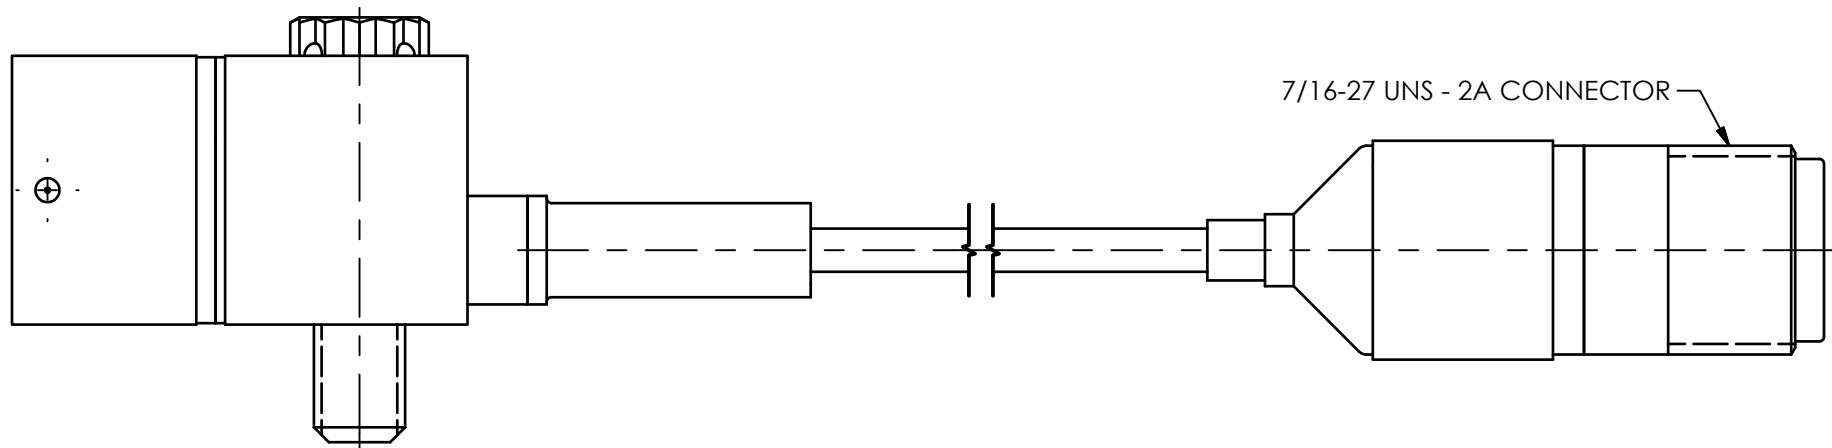
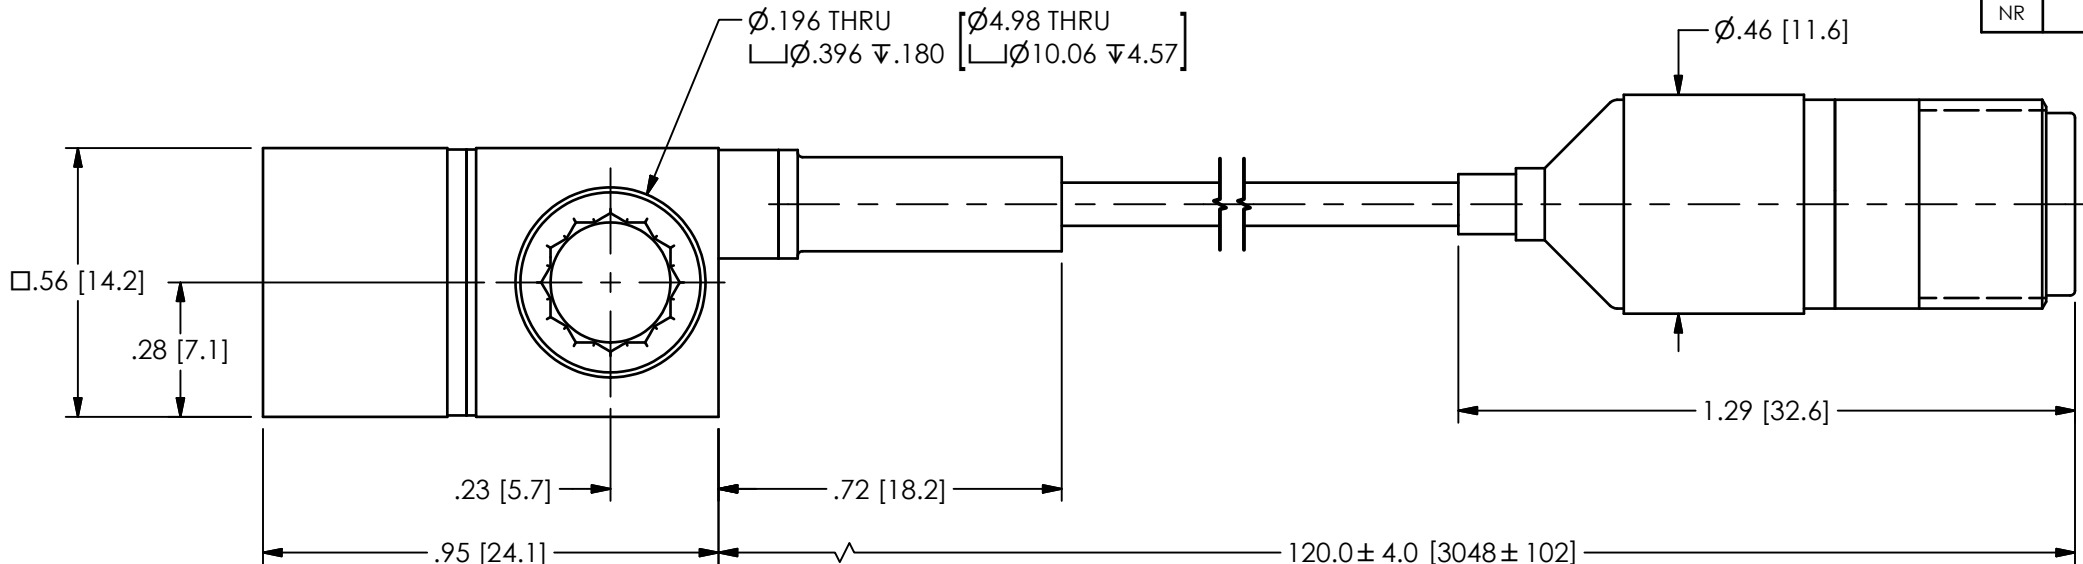

67483

REV	DESCRIPTION
NR	RELEASED TO DRAFTING




7/16-27 UNS - 2A CONNECTOR

MOUNTING HOLE PREPARATION:

$$1 \triangleright \emptyset.159[\emptyset 4.04] \nabla(X) +.130 [3.30]$$

10-32 UNJF-3B $\nabla(X) +.035$ [.89]

WHERE: (X)=DISTANCE MOUNTING SCREW
EXTENDS PAST MOUNTING SURFACE
[I.E. SCREW INSERTION DEPTH]



- 5.) CABLE MINIMUM BEND RADIUS: .25 [6.35]
- 4.) RECOMMENDED MOUNTING TORQUE: 10-20 INCH POUNDS [113-225 NEWTON CENTIMETERS]
- 3.) FOR BEST RESULTS, PLACE A THIN LAYER OF SILICONE GREASE (OR EQUIVALENT) ON INTERFACE PRIOR TO MOUNTING
- 2.) MOUNTING SURFACES SHOULD BE FLAT TO WITHIN .001 [.03] TIR ACROSS A 2" DIAMETER AREA WITH A SURFACE FINISH OF 63[1.61] OR BETTER FOR BEST RESULTS
- 1.) DRILL PERPENDICULAR TO MOUNTING SURFACE TO WITHIN $\pm 1^\circ$

 PCB PIEZOTRONICS™	
3425 WALDEN AVE. DEPEW, NY 14043 (716) 684-0001 E-MAIL: sales@pcb.com	
CODE IDENT. NO. 52681	DWG. NO. 67483
SCALE: 2.5X	SHEET 1 OF 1