



Prepolarized Free-Field Response

1/2" Microphones

SYSTEMS

- 378B02** High sensitivity, low - medium amplitude (16.5 dBA noise floor)
- 378A06** Mid - high frequency & amplitude (to 40 kHz & 146 dB)
- 376B02** High sensitivity, low - medium amplitude (uses short preamplifier)
- 378A07** Infrasound, extremely low frequency (to 0.1 Hz)
- HT378B02** High temperature, high sensitivity, low - medium amplitude (to 120°C)

CARTRIDGES

- 377B02** Low - medium frequency & amplitude (15 dBA to 146 dB)
- 377A06** Mid - high frequency & amplitude (to 40 kHz & 160 dB)
- 377A07** Infrasound, extremely low frequency (to 0.05 Hz)

1/4" Microphones

SYSTEMS

- 378C01** Ultrasound, high frequency & amplitude (to 100 kHz & 162 dB)

ARRAY

- 130E20** General purpose, BNC connector
- 130E21** General purpose, 10-32 connector
- 130E22** General purpose, SMB connector
- 130A23** High frequency & amplitude (20 kHz & 150 dB)

CARTRIDGES

- 377C01** Ultrasound, high frequency & amplitude (to 100 kHz & 164 dB)



Check Out Our Series of **ACOUSTIC EDUCATIONAL VIDEOS**

www.pcb.com/AcousticVideos

Prepolarized Pressure Field Response

1/2" Microphones

SYSTEMS

- 378B11** Infrasound, high sensitivity, low frequency & low noise (16.5 dBA noise floor)
- 378B13** Mid - high amplitude (to 20 kHz and 147 dB)

CARTRIDGES

- 377B11** Infrasound, high sensitivity, low frequency & low noise (15 dBA to 143 DB)
- 377B13** Mid - high amplitude (18 dBA to 160 dB)

1/4" Microphones

SYSTEMS

- 378A12** Extremely high amplitude (194 dB peak)
- 378A14** Ultrasound, side-vented, high frequency & amplitude (100 kHz & 174 dB)
- 378C10** Ultrasound, rear-vented, high frequency & amplitude (100 kHz & 174 dB)

CARTRIDGES

- 377A12** Extremely high amplitude (194 dB peak)
- 377A14** Ultrasound, side-vented, high frequency & amplitude (100 kHz & 174 dB)
- 377C10** Ultrasound, rear-vented, high frequency & amplitude (100 kHz & 174 dB)

Specialty Microphones

SYSTEMS

- 377B26** Probe for high temperature and space constrained environments (to 800 °C)

ARRAY

- 130B40** Low profile, surface or flush mount (1/8" or 3mm high)
- 130A24** Rugged, water & dust resistant (to 150 dB)

Prepolarized Random Incidence Response

1/2" Microphones

SYSTEMS

- 378C20** High sensitivity, low - medium amplitude (16.5 dBA & 16 kHz)
- 378A21** Mid - high frequency & amplitude (to 25 kHz ±2dB & 147 dB)
- HT378C20** High temperature & high sensitivity, low - medium amplitude (to 120 °C)

CARTRIDGES

- 377C20** Low - medium frequency & amplitude (15 dBA & 16 kHz)
- 377A21** Mid - high frequency & amplitude, (to 25 kHz ±2dB & 160 dB)

Preamplifiers

For 1/2" Microphones

- 426E01** General purpose (low noise)
- 426A10** 20 Hz high pass filter
- 426A11** Switchable gain, A-wt and 20 Hz high pass filter (maximum flexibility)
- HT426E01** High temperature (to 120 °C)
- 426A13** Short profile for confined areas (Length 1.4" or 35.7mm)

For 1/4" Microphones

- 426B03** General purpose (low noise)
- 426A05** For use with side-vented microphones (for 377A14)
- 426A07** Short profile for confined areas (Length 1.2" or 29.5mm)





Accessories

Adaptors & Filters

- 079A02** 1/4" microphone to 1/2" preamplifier adaptor
- 079B03** 1/2" microphone to 1/4" preamplifier adaptor
- 079B25** 1" microphone to 1/2" preamplifier adaptor
- 079A43** 1/2" low frequency adaptor (for 378A07)
- 079A24** Tripod stand adaptor to convert 5/8" stud to 1/4" for holder
- 079A29** Swivel head, stand to holder adaptor
- 079A41** Right angle adaptor for 1/4" microphone
- 079A42** Right angle adaptor for 1/2" microphone
- 426B02** 1/2" in-line A-weighted filter

Environmental Protection

- 079A06** 3-1/2" windscreen for 1/2" microphone
- 079A07** 3-1/2" windscreen for 1/4" microphone
- 079C20** Nose cone for 1/4" microphone
- 079B21** Nose cone for 1/2" microphone
- 079A46** 5 pack of water/dust resistant pads (for 130A24)
- EPS2116** Outdoor protection, 3/4" mount & 1/4"-20 side exit mount

Holders & Stands

- 079B10** Holder for 1/4" microphone
- 079A11** Holder for 1/2" microphone
- 079B23** Holder for both 1/4" and 1/2" microphone
- 079B32** Clip holder for 1/4" microphone
- 079A15** Tripod stand with boom arm
- 079B16** Miniature tripod stand with adjustable legs
- 079B17** Camera tripod stand
- 079A18** Adjustable clamp holder, large
- 079A45** Adjustable clamp holder, small
- 079A44** 5 link extension arm for clamp holder
- 379A02** Array microphone stand (6' x 6' or 2m x 2m)

ICP® Signal Conditioners

- 480B21** 3 channel sensor signal conditioner
- 480C02** Battery powered ICP® sensor signal conditioner
- 482C05** 4 channel sensor signal conditioner
- 483C05** 8 channel sensor signal conditioner
- 483C41** 8 channel line-powered signal conditioner
- 485B36** USB dual channel ICP® sensor signal conditioner

Calibrator, Class One

- CAL 200** Up to 1/2" microphone 1000 Hz, 94/114 dB
- CAL 250** Up to 1" microphone 250 Hz, 114 dB

Externally Polarized

1" Microphones

- 2570** Free-field, low frequency & low noise
- 2575** Pressure, low frequency & low noise

1/2" Microphones

- 2540** Free-field, mid - high frequency & amplitude
- 2559** Random incidence, mid - high frequency & amplitude (25 kHz ±2 dB)
- 2560** Random incidence, high sensitivity, low - medium amplitude
- 377C41** Free-field, high sensitivity, low frequency & low noise

1/4" Microphones

- 2520** Free-field, ultrasound, mid - high frequency & amplitude
- 2530** Pressure, rear-vented, ultrasound, high frequency & amplitude

1/2" Preamplifier

- 426A30** General purpose (low noise)

1/4" Preamplifier

- 426B31** General purpose (with integral cable)

PCB's prepolarized and externally polarized condenser microphones have been tested and meet Type 1/Class 1 specifications when integrated with sound level meters from some of the top manufacturers.



3425 Walden Avenue, Depew, NY 14043-2495 USA

Toll-Free in the USA 800-828-8840

24-hour SensorLineSM 716-684-0001

Fax 716-684-0987 Email info@pcb.com

Website www.pcb.com


AS9100 CERTIFIED ■ ISO 9001 CERTIFIED ■ A2LA ACCREDITED to ISO 17025

© 2015 PCB Group, Inc. In the interest of constant product improvement, specifications are subject to change without notice. PCB, ICP, Modally Tuned, Echo, Spindler, Swiveler and TORQDISC are registered trademarks of PCB Group. SoundTrack LXT, Spark and Blaze are registered trademarks of PCB Piezotronics. SensorLine is a service mark of PCB Group. All other trademarks are property of their respective owners.

TM-AC-MicroCatalog-0116

Printed in U.S.A.

MICROPHONES

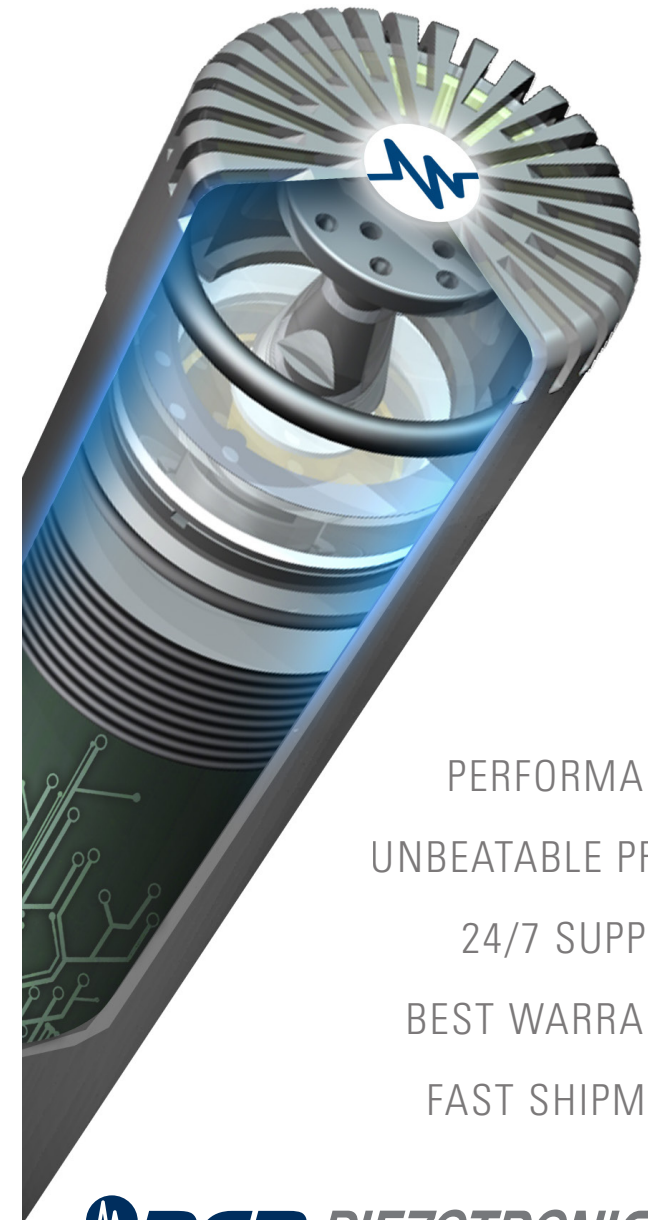

PERFORMANCE
UNBEATABLE PRICE
24/7 SUPPORT
BEST WARRANTY
FAST SHIPMENT

