

19229

PCB Piezotronics Inc. claims proprietary rights in the information disclosed hereon. Neither it nor any reproduction thereof will be disclosed to others without written consent of PCB Piezotronics Inc.

APPLICATION

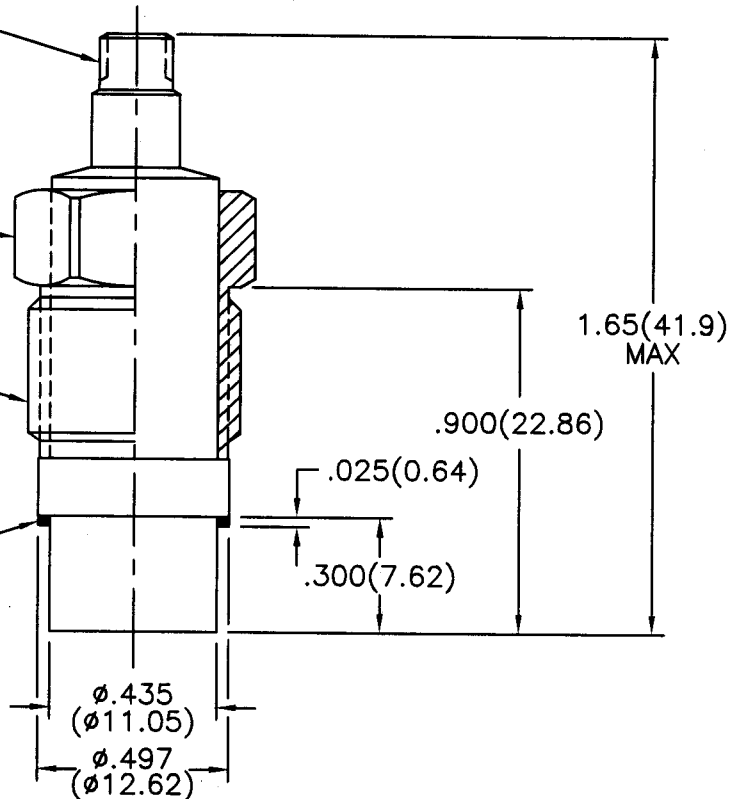
NEXT ASS'Y USED ON VAR

REVISIONS

REV	DESCRIPTION	ECN	DATE	APP'D
A	METRIC TOLERANCE CORRECTION	16610	12/13/02	DM12/02

ELECTRICAL CONNECTOR
CO-AXIAL 10-32 UNF-2AMODEL 060A12
CLAMP NUT 9/16 HEX
ST STL (SUPPLIED) $\triangle 3$

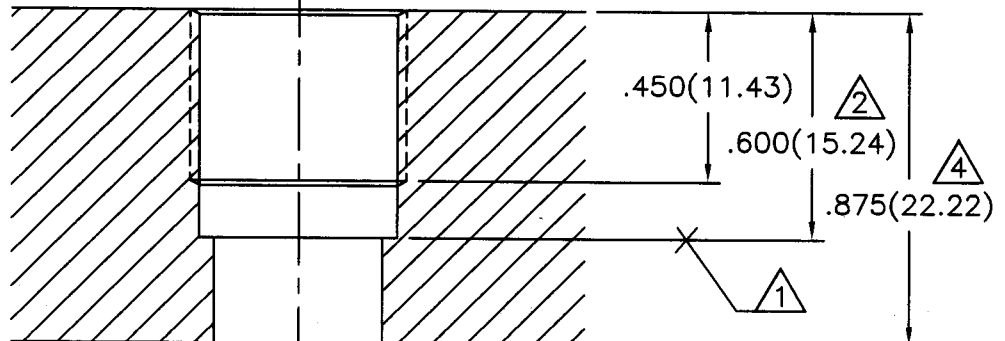
9/16-18 UNF-2A

MODEL 065A37
SEAL .025(0.64) THICK
BRASS (SUPPLIED)MOUNTING HOLE PREPARATION: $\phi .437$ ($\phi 11.10$)

THRU

 $\square \phi .515$ ($\phi 13.08$)X .600(15.24) ∇

TAP 9/16-18 UNF-2B

X .450(11.43) ∇  $\triangle 4$ DIMENSIONS SHOWN ARE FOR .875(22.22) THICK WALL, $\square$ FOR THICKER WALLS. $\triangle 3$ RECOMMENDED MOUNTING TORQUE ON 9/16 HEX
5.0 - 6.0 FOOT POUNDS(7 - 8 NEWTON METERS). $\triangle 2$ DRILL PERPENDICULAR TO MOUNTING SURFACE TO WITHIN $\pm 1^\circ$ $\triangle 1$ SEAL SURFACE MUST BE FLAT AND FREE OF TOOL
MARKS WITH A MINIMUM FINISH OF 63/ (1.6/).

UNLESS SPECIFIED TOLERANCES

DIMENSIONS IN INCHES		DIMENSIONS IN MILLIMETERS (IN PARENTHESIS)		DRAWN	JDM	12/13/02	MFG	TBS	12/19/02	PCB PIEZOTRONICS™	
DECIMALS XX ±.01		DECIMALS X ±0.3		CHK'D	Bm	12/17/02	ENGR	WJH	12/26/02	3425 WALDEN AVE. DEPEW, NY 14043	
XXX ±.005		XX ±0.13		APP'D	Fe	12/26/02	SALES	Jmm	12/19/02	(716) 684-0001 EMAIL: SALES@PCB.COM	
ANGLES ±2 DEGREES		ANGLES ±2 DEGREES		TITLE INSTALLATION DRAWING MODEL 116B03 PRESSURE SENSOR							
FILLETS AND RADII .003 - .005		FILLETS AND RADII (0.07 - 0.13)									
DD011 REV. B 03/13/98											
				CODE IDENT. NO. 52681		DWG. NO. 19229		SCALE: 2X			
								SHEET 1 OF 1			