


2 MOUNTING HOLES
C'BORED FOR M4
SOCKET CAP HEAD
SCREW. SHOULDER
HEIGHT 6.0mm

SENSONICS PRD04/5.0U01
IS.3127 SER.No.

CONNECTOR
SUBMINITURE R.F. SMC PLUG

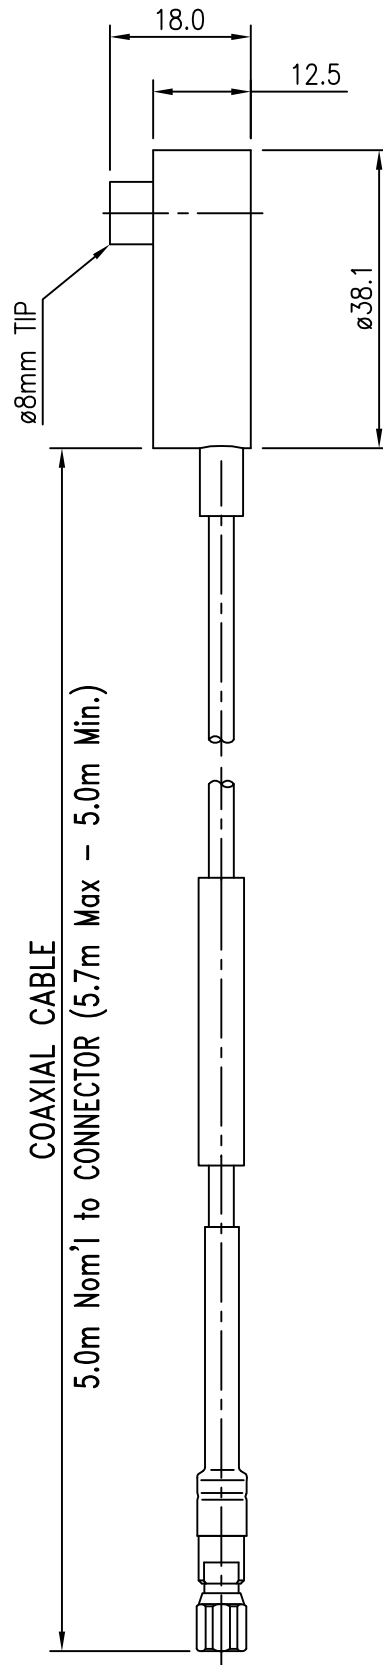

COAXIAL CABLE
5.0m Nom'l to CONNECTOR (5.7m Max - 5.0m Min.)

FOR ASSEMBLY SEE EA1412B/8
FOR PARTS LIST SEE 046/2064A/8
RANGE 0-4.0mm
SENSITIVITY 4mV/micrometre
TEMPERATURE RANGE -30°C to +180°C

ISSUE	
DATE	
CN. No.	
MOD'BY	
CHECKED	

CHANGE NOTES

PROJ.ENG. D.SIPOS	SCALE 1:1
DRAWN A.PITT	DIM'NS mm
CHECKED D.SIPOS	DATE 24.4.2001
CUST.REF. 3516	SHEET No. SHT 1 OF 1

SENSONICS LTD NORTHBRIDGE ROAD, BERKHAMSTED, HERTS, HP4 1EF, ENGLAND
Tel : +44 (0)1442 876833 Fax : +44 (0)1442 876477

TITLE
PRD04/5.0U01 ø8mm DISC EDDY CURRENT PROBE,
STANDOFF BASE. 5m UNARMoured CABLE,
FEMALE SMC CONNECTOR, RANGE 0 - 4.0mm

THIS DOCUMENT IS SUBJECT TO THE CONDITIONS
IN THE ENCLOSED MEMO DS 742

DRAWING No.
IS.3127

ISSUE
1