


Performance	ENGLISH	SI	
Sensitivity (±15 %)	10 pC/g	1.02 pC/(m/s <sup>2</sup> )	
Measurement Range	±2000 g pk	±19600 m/s <sup>2</sup> pk	
Frequency Range (+5 %)	9 kHz	9 kHz	[2]
Frequency Range (+10 %)	12 kHz	12 kHz	[2]
Frequency Range (+3 dB)	18 kHz	18 kHz	[2]
Resonant Frequency	≥38 kHz	≥38 kHz	
Non-Linearity	≤1 %	≤1 %	[3]
Transverse Sensitivity	≤5 %	≤5 %	
<b>Environmental</b>			
Overload Limit (Shock)	±21000 g pk	±206010 m/s <sup>2</sup> pk	
Temperature Range	-95 to +500 °F	-71 to +260 °C	
Temperature Response	See Graph	See Graph	[1]
Base Strain Sensitivity	0.0002 g/με	0.002 (m/s <sup>2</sup> )/με	[1]
<b>Electrical</b>			
Capacitance	930 pF	930 pF	[1]
Insulation Resistance (at 70° F [21°C])	≥10 <sup>12</sup> ohm	≥10 <sup>12</sup> ohm	
Insulation Resistance (at 500°F)	≥10 <sup>8</sup> ohm	≥10 <sup>8</sup> ohm	[1]
Output Polarity	Negative	Negative	
<b>Physical</b>			
Sensing Element	Ceramic	Ceramic	
Sensing Geometry	Shear	Shear	
Housing Material	Titanium	Titanium	
Sealing	Hermetic	Hermetic	
Size (Hex x Height)	1/2 in x 0.81 in	1/2 in x 20.6 mm	
Weight	0.39 oz	11 gm	[1]
Electrical Connector	10-32 Coaxial Jack	10-32 Coaxial Jack	
Electrical Connection Position	Side	Side	
Mounting Thread	10-32 Female	10-32 Female	

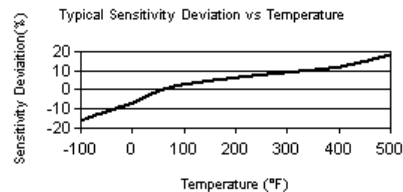

**Optional Versions** (Optional versions have identical specifications and accessories as listed for standard model except where noted below. More than one option maybe used.)

<b>J - Ground Isolated</b>		
Frequency Range (+5 %)	7000 Hz	7000 Hz
Frequency Range (+10 %)	8000 Hz	8000 Hz
Resonant Frequency	≥30 kHz	≥30 kHz
Electrical Isolation (Base)	>10 <sup>8</sup> ohm	>10 <sup>8</sup> ohm

<b>P - Positive Output Polarity</b>		
Output Polarity	Positive	Positive
<b>W - Water Resistant Cable</b>		
Electrical Connector	Sealed Integral Cable	Sealed Integral Cable
Electrical Connection Position	Side	Side

**Notes**

- [1] Typical.
- [2] Low frequency response is determined by external signal conditioning electronics.
- [3] Zero-based, least-squares, straight line method.

**Supplied Accessories**

- 080A109 Petro Wax (1)
- 081B05 Mounting Stud (10-32 to 10-32) (1)
- ACS-1 NIST traceable frequency response (10 Hz to upper 5% point). (1)
- M081B05 Mounting Stud 10-32 to M6 X 0.75 (1)

All specifications are at room temperature unless otherwise specified.  
 In the interest of constant product improvement, we reserve the right to change specifications without notice.  
 ICP® is a registered trademark of PCB group, Inc.

Entered: LLH	Engineer: GH	Sales: WDC	Approved: EB	Spec Number:
Date: 11/04/2008	Date: 09/26/2008	Date: 10/10/2008	Date: 10/29/2008	<b>357-2030-80</b>



3425 Walden Avenue  
 Depew, NY 14043  
 UNITED STATES  
 Phone: 888-684-0013  
 Fax: 716-685-3886  
 E-mail: vibration@pcb.com  
 Web site: www.pcb.com