


Performance	ENGLISH	SI	
Sensitivity (±15 %)	30 pC/g	3.1 pC/(m/s <sup>2</sup> )	
Measurement Range	±1500 g pk	±14700 m/s <sup>2</sup> pk	
Frequency Range (+5 %)	6 kHz	6 kHz	[2]
Frequency Range (+10 %)	7.5 kHz	7.5 kHz	[2]
Frequency Range (+3 dB)	8.5 kHz	8.5 kHz	[2]
Resonant Frequency	≥23 kHz	≥23 kHz	
Non-Linearity	≤1 %	≤1 %	[3]
Transverse Sensitivity	≤5 %	≤5 %	
<b>Environmental</b>			
Overload Limit (Shock)	±6000 g pk	±58860 m/s <sup>2</sup> pk	
Temperature Range	-95 to +500 °F	-71 to +260 °C	
Temperature Response	See Graph	See Graph	[1]
Base Strain Sensitivity	0.0006 g/με	0.006 (m/s <sup>2</sup> )/με	[1]
<b>Electrical</b>			
Capacitance	930 pF	930 pF	[1]
Insulation Resistance (at 70° F [21°C])	≥10 <sup>12</sup> ohm	≥10 <sup>12</sup> ohm	
Insulation Resistance (at 500°F)	≥10 <sup>8</sup> ohm	≥10 <sup>8</sup> ohm	[1]
Output Polarity	Negative	Negative	
<b>Physical</b>			
Sensing Element	Ceramic	Ceramic	
Sensing Geometry	Shear	Shear	
Housing Material	Titanium	Titanium	
Sealing	Hermetic	Hermetic	
Size (Hex x Height)	5/8 in x 0.85 in	5/8 in x 21.6 mm	
Weight	0.73 oz	21 gm	[1]
Electrical Connector	10-32 Coaxial Jack	10-32 Coaxial Jack	
Electrical Connection Position	Side	Side	
Mounting Thread	10-32 Female	10-32 Female	

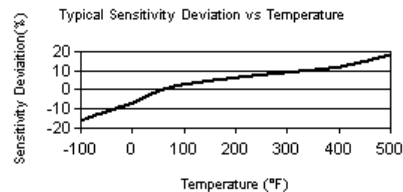

**Optional Versions** (Optional versions have identical specifications and accessories as listed for standard model except where noted below. More than one option maybe used.)

<b>J - Ground Isolated</b>		
Frequency Range (+5 %)	4000 Hz	4000 Hz
Frequency Range (+10 %)	5000 Hz	5000 Hz
Resonant Frequency	≥17 kHz	≥17 kHz
Electrical Isolation (Base)	>10 <sup>8</sup> ohm	>10 <sup>8</sup> ohm

<b>P - Positive Output Polarity</b>		
Output Polarity	Positive	Positive

<b>W - Water Resistant Cable</b>		
Electrical Connector	Sealed Integral Cable	Sealed Integral Cable
Electrical Connection Position	Side	Side

- Notes**
- [1] Typical.
  - [2] Low frequency response is determined by external signal conditioning electronics.
  - [3] Zero-based, least-squares, straight line method.

**Supplied Accessories**

- 080A109 Petro Wax (1)
- 081B05 Mounting Stud (10-32 to 10-32) (1)
- ACS-1 NIST traceable frequency response (10 Hz to upper 5% point). (1)
- M081B05 Mounting Stud 10-32 to M6 X 0.75 (1)

Entered: LLH	Engineer: BAM	Sales: WDC	Approved: EB	Spec Number:
Date: 04/08/2009	Date: 04/07/2009	Date: 04/07/2009	Date: 04/08/2009	<b>357-2210-80</b>



3425 Walden Avenue  
Depew, NY 14043  
UNITED STATES  
Phone: 888-684-0013  
Fax: 716-685-3886  
E-mail: vibration@pcb.com  
Web site: www.pcb.com

*All specifications are at room temperature unless otherwise specified.*  
In the interest of constant product improvement, we reserve the right to change specifications without notice.  
ICP® is a registered trademark of PCB group, Inc.