Model Number **320C18**	**ACCELEROMETER, ICP®**	Revision G ECN #: 36906

Performance	**ENGLISH**	**SI**	
Sensitivity (±10 %)	10 mV/g	1.02 mV/(m/s²)	
Measurement Range	±500 g pk	±4900 m/s² pk	
Frequency Range (±5 %)	1.0 to 10000 Hz	1.0 to 10000 Hz	
Frequency Range (±10 %)	0.7 to 18000 Hz	0.7 to 18000 Hz	
Frequency Range (±3 dB)	0.35 to 30000 Hz	0.35 to 30000 Hz	
Resonant Frequency	≥60 kHz	≥60 kHz	
Broadband Resolution (1 to 10000 Hz)	0.005 g rms	0.05 m/s² rms	[1]
Non-Linearity	≤1 %	≤1 %	[2]
Transverse Sensitivity	≤5 %	≤5 %	[3]
Environmental			
Overload Limit (Shock)	±10000 g pk	±98100 m/s² pk	
Temperature Range (Operating)	-100 to +325 °F	-73 to +163 °C	
Base Strain Sensitivity	≤0.0005 g/με	≤0.005 (m/s²)/με	[1]
Electrical			
Excitation Voltage	18 to 30 VDC	18 to 30 VDC	
Constant Current Excitation	2 to 20 mA	2 to 20 mA	
Output Impedance	≤100 Ohm	≤100 Ohm	
Output Bias Voltage	8 to 12 VDC	8 to 12 VDC	
Discharge Time Constant	0.25 to 2.0 sec	0.25 to 2.0 sec	
Settling Time (within 10% of bias)	<5 sec	<5 sec	
Spectral Noise (1 Hz)	2800 μg/√Hz	27468 (μm/sec² /√Hz	[1]
Spectral Noise (10 Hz)	700 μg/√Hz	6867 (μm/sec² /√Hz	[1]
Spectral Noise (100 Hz)	180 μg/√Hz	1766 (μm/sec² /√Hz	[1]
Spectral Noise (1 kHz)	64 μg/√Hz	628 (μm/sec² /√Hz	[1]
Physical			
Size (Height)	0.74 in	18.8 mm	
Weight	0.06 oz	1.7 gm	[1]
Sensing Element	Quartz	Quartz	
Size (Hex)	9/32 in	9/32 in	
Sensing Geometry	Shear	Shear	
Housing Material	Titanium	Titanium	
Sealing	Hermetic	Hermetic	
Electrical Connector	10-32 Coaxial Jack	10-32 Coaxial Jack	
Electrical Connection Position	Top	Top	
Mounting Thread	5-40 Male	5-40 Male	
Mounting Torque	8 to 12 in-lb	90 to 135 N-cm	

CE[4]

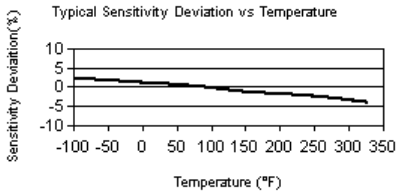

All specifications are at room temperature unless otherwise specified.
In the interest of constant product improvement, we reserve the right to change specifications without notice.
ICP® is a registered trademark of PCB group, Inc.

Optional Versions (Optional versions have identical specifications and accessories as listed for standard model except where noted below. More than one option maybe used.)

A - Adhesive Mount
Supplied Accessory: Model 080A90 Quick bond Gel (for use with accelerometer adhesive mtg bases to fill gaps on rough surfaces)

J - Ground Isolated

Frequency Range (±5 %)	1.0 to 8000 Hz	1.0 to 8000 Hz
Frequency Range (±10 %)	0.7 to 12000 Hz	0.7 to 12000 Hz
Frequency Range (±3 dB)	0.35 to 25000 Hz	0.35 to 25000 Hz
Resonant Frequency	≥50 kHz	≥50 kHz
Electrical Isolation (Base)	≥10^8 Ohm	≥10^8 Ohm
Size (Hex x Height)	3/8 in x 0.72 in	3/8 in x 18.3 mm
Weight	0.10 oz	3.0 gm

M - Metric Mount

Mounting Thread	M3x0.50 Male	M3x0.50 Male

Supplied Accessory: Model M080A15 Metric adhesive base, 0.31" hex x 0.125" thk, M3 x 0.50 thd, aluminum with insulating hardcoat finish replaces Model 080A15

W - Water Resistant Cable

Electrical Connector	Sealed Integral Cable	Sealed Integral Cable
Electrical Connection Position	Top	Top

Notes
[1] Typical.
[2] Zero-based, least-squares, straight line method.
[3] Transverse sensitivity is typically <= 3%.
[4] See PCB Declaration of Conformance PS023 for details.

Supplied Accessories
080A109 Petro Wax (1)
080A15 Adhesive Mounting Base (1)
ACS-1 NIST traceable frequency response (10 Hz to upper 5% point). (1)

Entered: SDS	Engineer: WDC	Sales: BAM	Approved: ECB	Spec Number:
Date: 09/19/2011	Date: 09/19/2011	Date: 09/19/2011	Date: 09/19/2011	**9794**

PCB PIEZOTRONICS VIBRATION DIVISION
3425 Walden Avenue
Depew, NY 14043
UNITED STATES
Phone: 800-828-8840
Fax: 716-684-0987
E-mail: info@pcb.com
Web site: www.pcb.com