
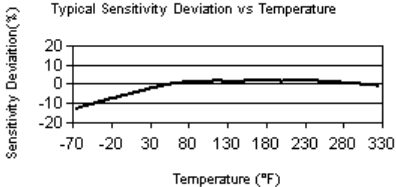


Model Number 352C33	<b>ACCELEROMETER, ICP®</b>		Revision H ECN #: 28610
<b>Performance</b> Sensitivity (±10 %) Measurement Range Frequency Range (±5 %) Frequency Range (±10 %) Resonant Frequency Broadband Resolution (1 to 10000 Hz) Non-Linearity Transverse Sensitivity	<b>ENGLISH</b> 100 mV/g ±50 g pk 0.5 to 10000 Hz 0.3 to 15000 Hz ≥50 kHz 0.00015 g rms ≤1 % ≤5 %	<b>SI</b> 10.2 mV/(m/s <sup>2</sup> ) ±490 m/s <sup>2</sup> pk 0.5 to 10000 Hz 0.3 to 15000 Hz ≥50 kHz 0.0015 m/s <sup>2</sup> rms ≤1 % ≤5 %	<b>Optional Versions</b> (Optional versions have identical specifications and accessories as listed for standard model except where noted below. More than one option maybe used.) <b>HT</b> - High temperature, extends normal operation temperatures [3] Frequency Range (5 %) 6 to 10000 Hz 6 to 10000 Hz Frequency Range (10 %) 4.5 to 15000 Hz 4.5 to 15000 Hz Broadband Resolution (1 to 10000 Hz) 0.0009 g rms 0.009 m/s <sup>2</sup> rms Temperature Range (Operating) -65 to +325 °F -54 to +163 °C Excitation Voltage 22 to 30 VDC 22 to 30 VDC Discharge Time Constant 0.07 to 0.15 sec 0.07 to 0.15 sec Spectral Noise (1 Hz) 107 µg/√Hz 1050 (µm/sec <sup>2</sup> /√Hz) Spectral Noise (10 Hz) 58 µg/√Hz 570 (µm/sec <sup>2</sup> /√Hz) Spectral Noise (100 Hz) 41 µg/√Hz 400 (µm/sec <sup>2</sup> /√Hz) Spectral Noise (1000 Hz) 9.8 µg/√Hz 96 (µm/sec <sup>2</sup> /√Hz) Output Bias Voltage 10 to 15 VDC 10 to 15 VDC [2] Supplied Accessory: Model ACS-68 Single Axis Amplitude Response Calibration from 5 Hz to upper 5% plotted on dB scale replaces Model ACS-1
<b>Environmental</b> Overload Limit (Shock) Temperature Range (Operating) Temperature Response Base Strain Sensitivity	±5000 g pk -65 to +200 °F See Graph 0.003 g/µε	±49000 m/s <sup>2</sup> pk -54 to +93 °C See Graph 0.029 (m/s <sup>2</sup> )/µε	[3] [1][3] [1]
<b>Electrical</b> Excitation Voltage Constant Current Excitation Output Impedance Output Bias Voltage Discharge Time Constant Settling Time (within 10% of bias) Spectral Noise (1 Hz) Spectral Noise (10 Hz) Spectral Noise (100 Hz) Spectral Noise (1 kHz)	18 to 30 VDC 2 to 20 mA ≤200 ohm 7 to 12 VDC 1.0 to 2.5 sec <10 sec 39 µg/√Hz 11 µg/√Hz 3.4 µg/√Hz 1.4 µg/√Hz	18 to 30 VDC 2 to 20 mA ≤200 ohm 7 to 12 VDC 1.0 to 2.5 sec <10 sec 380 (µm/sec <sup>2</sup> /√Hz) 110 (µm/sec <sup>2</sup> /√Hz) 33 (µm/sec <sup>2</sup> /√Hz) 14 (µm/sec <sup>2</sup> /√Hz)	[1] [1] [1] [1] <b>J</b> - Ground Isolated Frequency Range (5 %) 9 kHz 9 kHz Frequency Range (10 %) 14 kHz 14 kHz Resonant Frequency ≥40 kHz ≥40 kHz Electrical Isolation (Base) >10 <sup>8</sup> ohm >10 <sup>8</sup> ohm Size (Hex x Height) 0.44 in x 0.67 in 11.2 mm x 17.0 mm Weight 0.21 oz 6.0 gm
<b>Physical</b> Sensing Element Sensing Geometry Housing Material Sealing Size (Hex x Height) Weight Electrical Connector Electrical Connection Position Mounting Thread Mounting Torque	Ceramic Shear Titanium Hermetic 0.44 in x 0.62 in 0.20 oz 10-32 Coaxial Jack Side 10-32 Female 10 to 20 in-lb	Ceramic Shear Titanium Hermetic 11.2 mm x 15.7 mm 5.8 gm 10-32 Coaxial Jack Side 10-32 Female 113 to 226 N-cm	[1] <b>T</b> - TEDS Capable of Digital Memory and Communication Compliant with IEEE P1451.4 <b>TLA</b> - TEDS LMS International - Free Format <b>TLB</b> - TEDS LMS International - Automotive Format <b>TLC</b> - TEDS LMS International - Aeronautical Format <b>TLD</b> - TEDS Capable of Digital Memory and Communication Compliant with IEEE 1451.4 Temperature Range -10 to +200 °F -23 to +93 °C Excitation Voltage 20 to 30 VDC 20 to 30 VDC Output Bias Voltage 7.5 to 13 VDC 7.5 to 13 VDC <b>W</b> - Water Resistant Cable Electrical Connector Sealed Integral Cable Side Sealed Integral Cable Side Electrical Connection Position Side Side
 [6] <p>All specifications are at room temperature unless otherwise specified. In the interest of constant product improvement, we reserve the right to change specifications without notice. ICP® is a registered trademark of PCB group, Inc.</p>	<p>Typical Sensitivity Deviation vs Temperature</p> 	<p><b>Notes</b> [1] Typical. [2] TEDS option adds 1.0 VDC to bias voltage. [3] 200°F to 325°F data valid with HT option only. [4] Zero-based, least-squares, straight line method. [5] Transverse sensitivity is typically ≤ 3%. [6] See PCB Declaration of Conformance PS023 for details.</p> <p><b>Supplied Accessories</b> 080A Adhesive Mounting Base (1) 080A109 Petro Wax (1) 081B05 Mounting Stud (10-32 to 10-32) (1) ACS-1 NIST traceable frequency response (10 Hz to upper 5% point). (1) M081B05 Mounting Stud 10-32 to M6 X 0.75 (1)</p>	

Entered: BLS	Engineer: BAM	Sales: WDC	Approved: EB	Spec Number:
Date: 04/15/2008	Date: 04/15/2008	Date: 04/15/2008	Date: 04/15/2008	<b>13118</b>



3425 Walden Avenue  
Depew, NY 14043  
UNITED STATES  
Phone: 888-684-0013  
Fax: 716-685-3886  
E-mail: vibration@pcb.com  
Web site: www.pcb.com