

Model Number  
**357C73**

# CHARGE OUTPUT ACCELEROMETER

Revision: D  
ECN #: 35386

## Performance

	ENGLISH	SI
Sensitivity(± 5 %)	± 100 pC/g	± 10.2 pC/(m/s <sup>2</sup> )
Measurement Range	± 300 g pk	± 2943 m/s <sup>2</sup> pk
Frequency Range(± 5 %)	2 KHz	2 KHz
Resonant Frequency	≥ 11 KHz	≥ 11 KHz
Non-Linearity	≤ 1 %	≤ 1 %
Transverse Sensitivity	≤ 5 %	≤ 5 %

## Environmental

Overload Limit(Shock)	± 1000 g pk	± 9810 m/s <sup>2</sup> pk
Temperature Response	See Graph	See Graph
Temperature Response	See Graph	See Graph
Temperature Response	See Graph	See Graph
Base Strain Sensitivity	0.033 g/μe	0.32 (m/s <sup>2</sup> )/μe
Radiation Exposure Limit(Integrated Neutron Flux)	1 E10 N/cm <sup>2</sup>	1 E10 N/cm <sup>2</sup>
Radiation Exposure Limit(Integrated Gamma Flux)	1 E8 rad	1 E8 rad


## Electrical

Capacitance(Pin to Pin)	1575 pF	1575 pF
Capacitance(Pin to Case)	26 pF	26 pF
Capacitance(Uncoupled Between Pins)	≤ 2 pF	≤ 2 pF
Insulation Resistance(Pin to Case 70° F)	>10 <sup>6</sup> ohm	>10 <sup>6</sup> ohm
Insulation Resistance(Pin to Pin 70° F)	>10 <sup>9</sup> ohm	>10 <sup>9</sup> ohm
Insulation Resistance(Pin to Pin 90° F)	>100 kohm	>100 kohm
Output Polarity	Differential	Differential

## Physical

Sensing Element	Ceramic	Ceramic
Sealing	Hermetic	Hermetic
Size (Height x Diameter)	1.48 in x 0.75 in	37.6 mm x 19 mm
Weight	3.8 oz	110 gm
Electrical Connector	7/16-27 2-Pin	7/16-27 2-Pin
Electrical Connection Position	Side	Side
Mounting	Through Holes (3)	Through Holes (3)

Typical Sensitivity Deviation vs Temperature

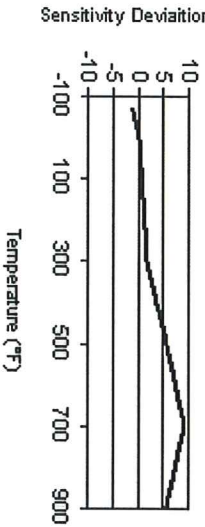

All specifications are at room temperature unless otherwise specified.  
In the interest of constant product improvement, we reserve the right to change specifications without notice.  
ICP® is a registered trademark of PCB Group, Inc.

## OPTIONAL VERSIONS

Optional versions have identical specifications and accessories as listed for the standard model except where noted below. More than one option may be used.

## NOTES:

- [1] Typical.
- [2] Low frequency response is determined by external signal conditioning electronics.
- [3] Zero-based, least-squares, straight line method.
- [4] Transverse sensitivity is typically ≤ 3%.

## SUPPLIED ACCESSORIES:

Model 081A99 Cap Screw (3)  
Model ACS-1 NIST traceable frequency response (10 Hz to upper 5% point).

Entered:	Engineer:	Sales:	Approved:	Spec Number:
Date: 3/31/11	Date: 3/31/11	Date: 3/31/11	Date: 3/31/11	33015



Phone: 716-684-0001  
Fax: 716-685-3886  
E-Mail: vibration@pcb.com

3425 Walden Avenue, Depew, NY 14043