



Nuclear Power Instrumentation

Sensors with radiation hardened approvals
for nuclear power environments



Energy & Power Generation

Nuclear Power Instrumentation

- High temperature vibration measurements
- Steam turbine testing
- Monitoring of boiling water reactors

PCB®'s charge accelerometers utilize piezo ceramic sensing elements to directly output an electrostatic charge signal that is proportional to applied acceleration. Charge accelerometers do not contain built-in signal conditioning electronics. As a result, external signal conditioning is required to interface their generated measurement signals to readout or recording instruments. The sensor's charge output signals can be conditioned with an in-line, fixed charge amplifier.

Since there are no electronics built into charge accelerometers, they can operate and survive exposure to very high temperatures (up to +1200 °F/+649 °C for some models). In addition, charge accelerometers are used for thermal cycling requirements or to take advantage of existing charge amplifier signal conditioning equipment. It is important to note that measurement resolution and low frequency response for charge acceleration sensing systems are dependent upon the noise floor and discharge time constant characteristics of the signal conditioning and readout devices used.





Radiation Hardened High Temperature Charge Accelerometers

- Survives integrated gamma flux to 10^8 rads
- Survives integrated neutron flux to 10^{10} N/cm²



550°F
(288 °C)

High Temperature Charge Accelerometer
Model 357B53

- Sensitivity: 100 pC/g
- Measurement Range: ±150 g pk
- Frequency Range: 3 kHz pk
- Electrical Connector: 10-32 coaxial jack



550°F
(288 °C)

High Temperature Charge Accelerometer
Model 357B54

- Sensitivity: 100 pC/g
- Measurement Range: ±150 g pk
- Frequency Range: 3 kHz pk
- Electrical Connector: 10-32 coaxial jack

Hardline Cable, Radiation Hardened



10-32 Coaxial Plug
Model FZ



Shielded Hardline Cable
Model 023XXX



10-32 Coaxial Jack
Model GA

In-line Charge Amplifiers, Radiation Hardened



In-line Charge Amplifier
Model 422E65/A

- Sensitivity: 1 mV/pC
- Voltage Output: ±5 V pk
- Temperature Range (Operating): -65 to +250 °F

In-line Charge Amplifier
Model 422E66/A


- Sensitivity: 10 mV/pC
- Voltage Output: ±5 V pk
- Temperature Range (Operating): -65 to +250 °F

TipsFromTechs

Recommended Components for a Typical Installation

- A Model 357B53 or 357B54 – Charge accelerometer
- B Model 023FZXXXFZ – Cable with 10-32 plug to 10-32 plug
- C Model 422E65/A or 422E66/A – In-line charge amplifier
- D Model 023FZXXXGA – Cable with 10-32 plug to 10-32 jack
- E Model 003C03 – Cable with 10-32 plug to BNC plug
- F ICP® sensor signal conditioner
- G Model 012A03 – Cable with BNC plug to BNC plug
- H Readout, recording, or data acquisition device

XXX = Denote cable length, 010 = 10 feet (Metric lengths available)

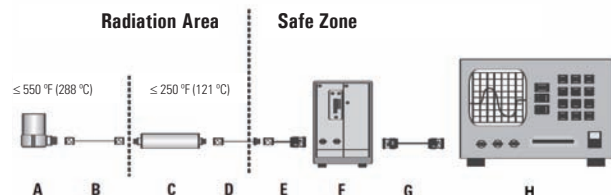

Energy & Power Generation Nuclear Power Instrumentation

Radiation Hardened Very High Temperature Charge Accelerometers



900°F
(482°C)

Very High Temperature Charge Accelerometer Model 357B61

- Sensitivity: 10 pC/g
- Measurement Range: ±1000 g pk
- Frequency Range: 5 kHz pk
- Electrical Connector: 10-32 coaxial jack



900°F
(482°C)

Very High Temperature Charge Accelerometer Model 357B69

- Sensitivity: 3.5 pC/g
- Measurement Range: ±500 g pk
- Frequency Range: 6 kHz pk
- Electrical Connector: 10-32 coaxial jack



Hardline Cable, Radiation Hardened



Hardline Cable with 10-32 Plug to 10-32 Jack Model 023A10

Supplied Accessory for 357B61 & 357B69



PTFE Cable with 10-32 Plug to 10-32 Plug Model 003AXX

XXX = Denote cable length, 010 = 10 feet
(Metric lengths available)

In-line Charge Amplifier, Radiation Hardened



In-line Charge Amplifier Model 422E65/A

- Sensitivity: (±2%) 1 mV/pC
- Voltage Output: ±5 V pk
- Temperature Range (Operating):
-65 to +250 °F

In-line Charge Amplifier Model 422E66/A


- Sensitivity: (±2%) 10 mV/pC
- Voltage Output: ±5 V pk
- Temperature Range (Operating):
-65 to +250 °F

Tips From Techs

Recommended Components for a Typical Installation

- A Model 357B61 or 357B69 – Charge accelerometer
- B Model 023A10 – Cable with 10-32 plug to 10-32 jack
- C Model 003AXX – Cable with 10-32 plug to 10-32 plug
- D Model 422E65/A or 422E66/A – In-line charge amplifier
- E Model 003C03 – Cable with 10-32 plug to BNC plug
- F ICP® sensor signal conditioner
- G Model 012A03 – Cable with BNC plug to BNC plug
- H Readout, recording, or data acquisition device

XXX = Denote cable length, 010 = 10 feet (Metric lengths available)

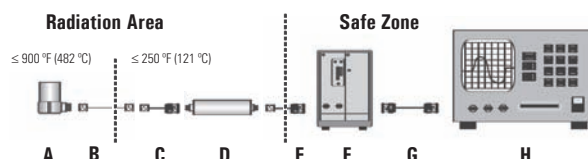



Radiation Hardened Very High Temperature Charge Accelerometers



Very High Temperature Charge Accelerometer
Model 357C71

- Sensitivity: 10 pC/g
- Measurement Range: ±1000 g pk
- Frequency Range: 4 kHz pk
- Electrical Connector: 7/16-27 2-pin



Very High Temperature Charge Accelerometer
Model 357C72

- Sensitivity: 50 pC/g
- Measurement Range: ±500 g pk
- Frequency Range: 2.5 kHz pk
- Electrical Connector: 7/16-27 2-pin



Very High Temperature Charge Accelerometer
Model 357C73

- Sensitivity: 100 pC/g
- Measurement Range: ±300 g pk
- Frequency Range: 2 kHz pk
- Electrical Connector: 7/16-27 2-pin

Hardline Cable, Radiation Hardened



2-socket Plug, 7/16-27 thd
Model GN



2-conductor Hardline Cable
Model 013



2-pin Jack, 7/16-27 thd
Model GP

PTFE Jacketed Cable



PTFE Jacketed Cable with ET Connector to BP Connector (25 ft cable)
045M19 Cabling

Differential Charge Amplifiers



Differential Charge Amplifier
Model 422M182

- Sensitivity: 4 mV/pC
- Voltage Output: ±5 V pK
- Temperature Range (Operating): -60 to +185 °F



Differential Charge Amplifier
Model 422M183


- Sensitivity: 6 mV/pC
- Voltage Output: ±5 V pK
- Temperature Range (Operating): -60 to +185 °F

Tips From Techs

Recommended Components for a Typical Installation

- A Model 357C71 or 357C72 or 357C73 – Charge accelerometer
- B Model 013GNXXXGP – Cable with 2 socket plug to 2 pin jack
- C Model 045M19 – Cable with ET connector to BP connector
- D Model 422M182 or Model 422M183 – Charge amplifier
- E Model 003D03 – Cable with BNC plug to BNC plug
- F ICP® sensor signal conditioner
- G Model 012A03 – Cable with BNC plug to BNC plug
- H Readout, recording, or data acquisition device

XXX = Denote cable length, 010 = 10 feet (Metric lengths available)

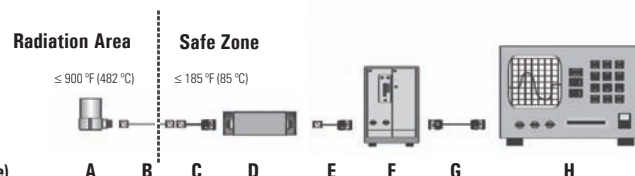

Energy & Power Generation

Nuclear Power Instrumentation

Radiation Hardened Very High Temperature Charge Accelerometers



900°F
(482 °C)

Very High Temperature Charge Accelerometer
Model 357C71



- Sensitivity: 10 pC/g
- Measurement Range: ±1000 g pk
- Frequency Range: 4 kHz pk
- Electrical Connector: 7/16-27 2-pin



900°F
(482 °C)

Very High Temperature Charge Accelerometer
Model 357C72



- Sensitivity: 50 pC/g
- Measurement Range: ±500 g pk
- Frequency Range: 2.5 kHz pk
- Electrical Connector: 7/16-27 2-pin



900°F
(482 °C)

Very High Temperature Charge Accelerometer
Model 357C73



- Sensitivity: 100 pC/g
- Measurement Range: ±300 g pk
- Frequency Range: 2 kHz pk
- Electrical Connector: 7/16-27 2-pin

Hardline Cable, Radiation Hardened



**2-socket Plug,
7/16-27 thd**
Model GN



**2-conductor
Hardline Cable**
Model 013



**2-pin Jack,
7/16-27 thd**
Model GP

PTFE Jacketed Cable



**PTFE Jacketed Cable with
ET Connector to Pigtails (25 ft cable)**
045M21 Cabling

Differential Charge Amplifiers



Differential Charge Amplifier
Model 421A3X

- Configurable sensitivity
- Voltage Output: ±5 V pk
- Temperature Range (Operating): -22 to +185 °F



Differential Charge Amplifier
Model EX682A40

- Sensitivity: 10 mV/pC
- Voltage Output: ± 2.5 V pk
- Temperature Range (Operating): -40 to +176 °F




Tips From Techs

Recommended Components for a Typical Installation


- A Model 357C71 or 357C72 or 357C73 – Charge accelerometer
- B Model 013GNXXXGP – Cable with 2 socket plug to 2 pin jack
- C Model 045M19 – Cable with ET connector to pigtails
- D Model 421A3X or model EX682A40 – Charge amplifier
- E Model 003ACXXXAD – Cable with pigtails to BNC plug
- F ICP® sensor signal conditioner
- G Model 012A03 – Cable with BNC plug to BNC plug
- H Readout, recording, or data acquisition device

XXX = Denote cable length, 010 = 10 feet (Metric lengths available)

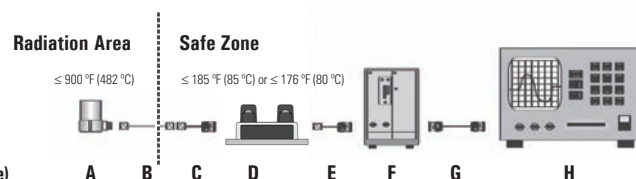



Radiation Hardened Extreme Temperature Charge Accelerometers

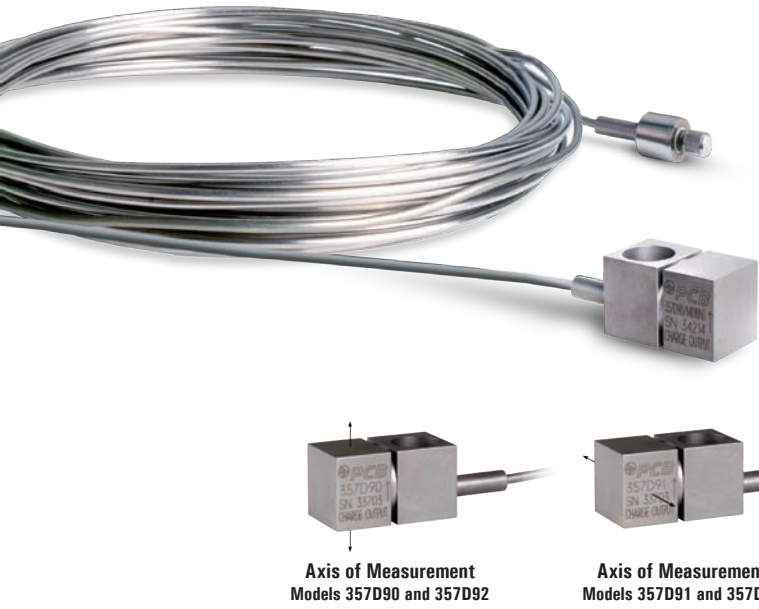

1200°F
(649 °C)
Extreme Temperature Charge Accelerometer
Model 357D90

- Sensitivity: 5 pC/g
- Measurement Range: ±1000 g pk
- Frequency Range: 2.5kHz pk
- Output into sensor base

1200°F
(649 °C)
Extreme Temperature Charge Accelerometer
Model 357D92

- Sensitivity: 2.3 pC/g
- Measurement Range: ±1000 g pk
- Frequency Range: 2.5kHz pk
- Output into sensor base

1200°F
(649 °C)
Extreme Temperature Charge Accelerometer
Model 357D91

- Sensitivity: 5 pC/g
- Measurement Range: ±1000 g pk
- Frequency Range: 2.5kHz pk
- Output perpendicular to sensor base with sensitivity in the transverse direction

1200°F
(649 °C)
Extreme Temperature Charge Accelerometer
Model 357D93

- Sensitivity: 2.3 pC/g
- Measurement Range: ±1000 g pk
- Frequency Range: 2.5kHz pk
- Output perpendicular to sensor base with sensitivity in the transverse direction

Axis of Measurement
Models 357D90 and 357D92

Axis of Measurement
Models 357D91 and 357D93

PTFE Jacketed Cable



PTFE Cable with 10-32 Plug to 10-32 Plug

Model 003AXX

XXX = Denote cable length, 010 = 10 feet
(Metric lengths available)

In-Line Charge Amplifiers



In-line Charge Amplifier

Model 422E35

- Sensitivity: 1 mV/pC
- Voltage Output: ±2.5 V pk
- Temperature Range (Operating): -65 to +250 °F

In-line Charge Amplifier

Model 422E36


- Sensitivity: 10 mV/pC
- Voltage Output: ±2.5 V pk
- Temperature Range (Operating): -65 to +250 °F

Tips From Techs

Recommended Components for a Typical Installation

- A Model 357D90 or 357D91 or 357D92 or 357D93 – Charge accelerometer
- B Model 003AXX – Cable with 10-32 plug to 10-32 plug
- C Model 422E35 or 422E36 – In-line charge amplifier
- D 003DXX – Cable with BNC plug to BNC plug
- E ICP® sensor signal conditioner.
- F Model 012A03 – Cable with BNC plug to BNC plug
- G Readout, recording, or data acquisition device

XXX = Denote cable length, 010 = 10 feet (Metric lengths available)

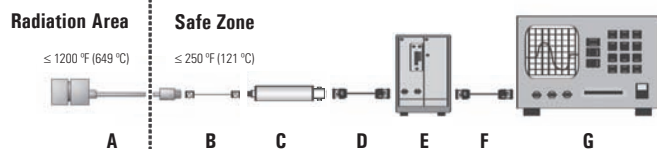



Corporate Headquarters - Depew, NY



The Global Leader in Sensors & Instrumentation For All Your Industrial Applications!

- Motor Vibration
- Pumps & Submersible Pumps
- Paper Machines & Conveyors
- Combustion Dynamics Instrumentation
- Cooling Towers & HVAC
- Gearboxes
- Wind Turbine Condition Monitoring
- Oil & Gas Wells and Pipelines
- Vibration Screens & Feeders
- Reciprocating Machinery
- Machine Tool Spindles
- Steel Rolling & Annealing
- Rotary Screw Compressors
- Nuclear Power Instrumentation
- Shock Monitoring

Over 10,000 Sensors In Stock and Ready to Ship!

IMI Sensors Platinum Stock Products represent some of our most popular models and can be used in a wide range of applications. As you browse this brochure, you will find Platinum Products indicated with the "Platinum Shield" icon (right).



Our Platinum Products are available with our Lifetime Warranty and fast delivery. If for any reason you are not 100% satisfied with your IMI Sensors Platinum Stock Product, we will repair, replace or exchange the product at no charge. For U.S. customers, all IMI Sensors Platinum Stock Products will ship within 24 hours. IF NOT, YOUR SHIPPING IS FREE!

Visit www.imi-sensors.com for complete details.

IMI SENSORS

A PCB PIEZOTRONICS DIV.

Corporate Headquarters 3425 Walden Avenue Depew, NY 14043-2495 USA

Toll-free in the USA 800-959-4464 ■ 24-hour SensorLineSM 716-684-0003

Fax 716-684-3823 ■ Email imi@pcb.com ■ Website www.imi-sensors.com

AS9100 CERTIFIED ■ ISO 9001 CERTIFIED ■ A2LA ACCREDITED to ISO 17025

© 2015 PCB Group, Inc. In the interest of constant product improvement, specifications are subject to change without notice. PCB, ECHO, ICP, IMI, Modally Tuned, Spindler, Swiveler and TORKDISC are registered trademarks of PCB Group. SoundTrack LXT, Spark and Blaze are registered trademarks of PCB Piezotronics. SensorLine is a service mark of PCB Group. All other trademarks are properties of their respective owners. PCB is an EOE/AAP Employer.

IMI-App-Nuclear-0715

